

## Quartz<sup>TM</sup> QX/QN/QG/QC

Explosionproof, nonincendive, I.S. & general purpose on/off valve monitor





## Quartz™ Explosionproof valve monitoring

The Quartz is available in explosionproof (QX), nonincendive, intrinsically safe (QN), low temperature (QC) and general purpose (QG) versions. The robust epoxy-coated anodized aluminum construction, and optional stainless steel version, makes this platform extremely durable and well-suited for use in corrosive, heavy washdown environments.

Options may be selected to accommodate most applications.

### Save space with low profile design

Clearance above the actuator is critical in complex piping systems. Quartz boldly displays valve position and encloses all electrical components in an explosionproof compartment with less than 5" clearance requirement.

### The Quartz series

The Stonel Quartz series is durable, corrosion-resistant, and versatile, making it ideal for most of your process valve monitoring requirements.

#### Enclosures optimized for environment




**QX:** Explosionproof, water tight and corrosion-resistant enclosure is approved for use in Div. 1/Zone 1 hazardous areas. Available options include stainless steel and epoxy-coated anodized aluminum.



**QN:** Nonincendive is approved for Div. 2/Zone 2 hazardous environments with proximity sensors using a clear cover. Intrinsically safe NAMUR sensors or passive switches are available for Div. 1/Zone 0 applications.



**QG:** General purpose features a clear Lexan® cover with mechanical switches. All enclosures are Type 4, 4x, and 6.

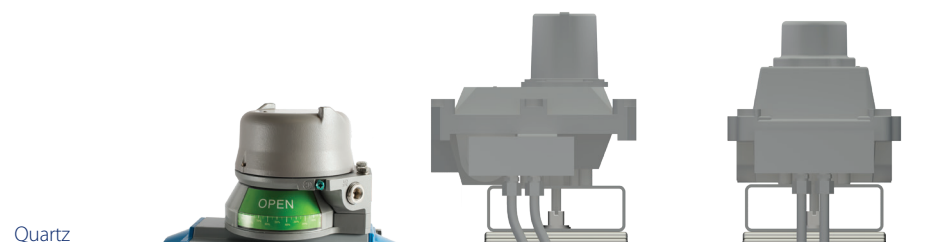

## Features

### 1. Enclosures optimized for environment

Available in three enclosure styles suitable for use in various process environment areas.

### 2. Rapid enclosure access

Screw-on cover allows quick enclosure access, saving you valuable maintenance and set-up time. The cover provides a vaportight seal and allows entry to internal components in less than five seconds.

### 3. Faster wiring

Pre-wired and labeled terminal strip enables quick, convenient attachment of field wires.

### 4. Wide variety of switching & communication


Switching options include dual module sensors and communication, Maxx-Guard proximity switches, and mechanical switches. Continuous signal output is available in a 4-20 mA position transmitter.

### 5. Quick set cams are easy to adjust

Touch and tune switch settings allow you to make adjustments in seconds without the use of tools.

### 6. Dual shaft o-ring seals eliminate corrosion

Top inner and bottom outer shaft o-rings seal the drive bushing from both external corrosives and internal contaminants that enter the enclosure.

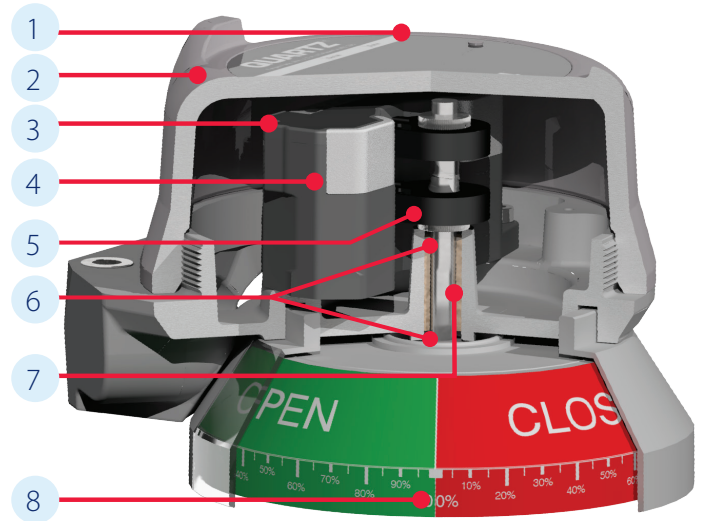

### 7. Special drive bushing assures long cycle life

The oil impregnated bronze bushing maintains smooth operation and eliminates the potential for shaft seizure due to actuator shaft eccentricity.

### 8. Bold space saving visual indication

Visual indicator offers excellent viewability without sacrificing accessibility or adding to space requirements. Indicators are also available with continuous percentage or three-way indication. (See page 17)

## Wide variety of switch/sensor functions

A wide variety of switch/sensor communications and position transmitters may be selected for the Quartz series. Options include 2, 4 or 6 mechanical or proximity switches, position transmitters with or without switches, and the StoneL dual module with two SST or two

NAMUR sensors or AS-Interface, DeviceNet™ or Foundation Fieldbus communication capabilities.



Proximity switches

Mechanical switches

## Speed installation with LED indication

StoneL's coordinated visual indicator and LEDs give you an extra measure of safety and increased convenience during plant start-up and operation. Green visual indication and green LED means the valve is open and the computer circuit is properly operating. Red visual indication and red LED means the valve is closed and the computer is properly matched. All systems are functioning properly.



## Eliminate seal fittings in Division 1 and 2 areas

FMus ratings certify the Quartz QX series with proximity switches for use without seal fittings in all hazardous areas. By passing special pressure piling tests, the all aluminum enclosure was certified for this elite distinction. Now, a time-consuming procedure can be safely eliminated in Division 1 and Division 2 areas.

## Consolidate your components and minimize costs

The Quartz design offers up to three conduit entries with extra wire terminations. By terminating solenoid valves in the switch enclosure, significant savings are realized by eliminating a junction box, wiring, conduit materials, and labor.





## Mounting kits


Kits may be ordered in 316 stainless steel. Consult StoneL factory for details

### Sealed mounting kit

Mounting to standard actuators is achieved with a bold visual indicator and sealed mounting system. Sealed mounting is exclusive with extended visual indicator option N. Adaptor plate is epoxy-coated anodized aluminum. All fasteners and couplings are stainless steel.



- Direct mount to actuators with VDI/VDE 3845 interface.
- Tolerant to vibration and mechanical stress.
- Prevents contamination and icing in coupling area.
- Available for all VDI/VDE 3845 (NAMUR) mounting configurations and most quarter-turn actuators.

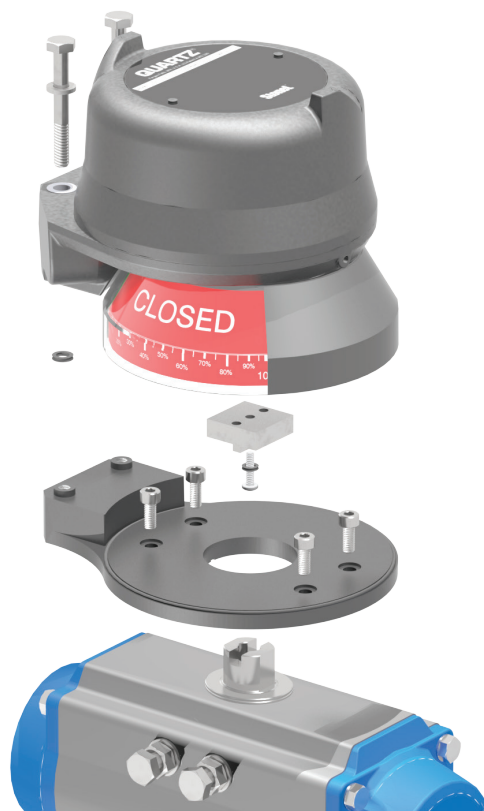

### Quarter-turn actuators

Low profile convenient mounting systems are readily available in stainless steel for most standard actuators.



### Manual valves

Proper fit and operation is assured with StoneL's custom designs for each manual valve. Hundreds of unique mounting systems have been designed and fabricated for manually operated valves.



### Positioners

Quartz position transmitter and switches may be retrofitted directly to most positioners. 4-20 feedback may be provided on simple pneumatic positioners.



### Linear operators

Precision ball joint connections attach the Quartz to valve travel stems. Stroke lengths ranging from 20 mm to 150 mm ( $\frac{3}{4}$ " to 6") may be easily accommodated.



## Quartz stainless steel option



### For the most challenging environments

The explosionproof Quartz for process valve monitoring is available with a 316 stainless steel enclosure that is extremely durable and well-suited for use in corrosive, heavy washdown and high seas environments. A broad range of switching, position transmitters and communication options may be selected to accommodate most applications. You can attach the Quartz to quarter-turn actuators, manual operators, linear operators, and positioners using readily available stainless steel mounting systems.




## Position transmitter

### 4-20 mA position transmitter


Position transmitters provide a precise 4-20 mA signal on a two-wire DC loop. Control valves and dampers are accurately monitored through their range of travel offering assurance of exact valve position at all times. Several function options are available making it easy to find the correct product that fits your desired application. Choose a position transmitter with a standard potentiometer (5\_), a vibration proof, high-performance potentiometer (7\_), or the innovative non-contact magnetic resistive (mag res) digital transmitter (T\_).

### Digital transmitter

The digital transmitter utilizes an innovative non-contact magnetic sensor. The module features easy push button calibration to reduce set-up and commissioning time. With the bold red/green LED indication, the unit is visible from a distance and the calibration diagnostic LED indications confirm set up is valid. The position transmitter module housed with the Quartz platform is fully sealed and potted, providing reliable operation and outstanding vibration tolerance in tough applications.

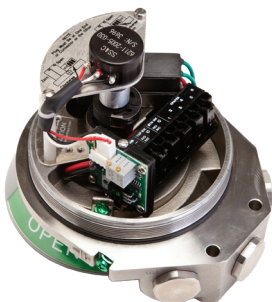

Position transmitter

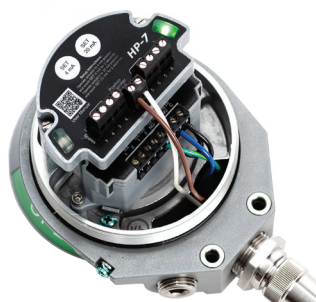


Digital transmitter

### Position transmitter specifications

	Standard transmitter (5_)	High performance transmitter (7_)	Digital transmitter (T_)
Output	2-wire 4-20 mA	2-wire 4-20 mA	2-wire 4-20 mA
Supply source	10 - 40 VDC	10 - 40 VDC	10 - 40 VDC
Indication	None	None	Red/Green LED*
Span range	35° to 270°	35° to 270°	35° to 320°
Maximum loading	700 ohms @ 24 VDC	700 ohms @ 24 VDC	683 ohms @ 24 VDC
Refresh rate	< 1 ms	< 1 ms	< 5 ms
Linearity error	+/-0.85°	+/-0.35°	+/-0.35°
Cycle life	2 million rotations	50 million rotations	Unlimited
Vibration tolerance	Acceptable	Outstanding	Outstanding

\* Open / Closed LED position indication and calibration status diagnostics

### Electrical schematic

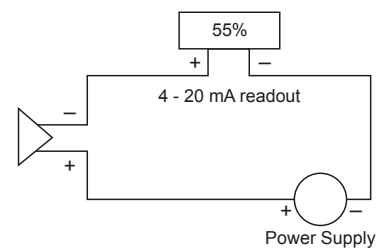

Sensors and communications

Dual module system

The Quartz series is available with the dual module in its various configurations. Two solid state sensors and/or communications and other electronics are sealed in for the ultimate in reliability and convenience. All dual module versions have a five year warranty.



Switching and sensor specifications

SST switching sensors (35)

Configuration	(2) SST solid state sensors Wire terminations for one or two solenoids
Operations	Normally open (NO) for Normally closed (NC), consult factory
Maximum current inrush	1.0 amp
Maximum current continuous	0.1 amp
Minimum on current	0.5 mA
Maximum leakage current	0.25 mA (AC) 0.15 mA (DC)
Voltage range	20 - 250 VAC 8 - 250 VDC
Maximum voltage drop	6.5 volts @ 10 mA 7.2 volts @ 100 mA

Wiring diagram (35)

SST<sup>240V</sup>

Solenoid Valve

Solenoid Output

Solenoid Power

Valve Open  
Common  
Valve Closed  
Common

Sensor specifications

NAMUR sensor (45)

Configuration	(2) NAMUR sensors (EN 60947-5-6; I.S.) Wire terminations for one or two solenoids
Operation	Normally closed NAMUR sensors (solid state)
Voltage range	5 - 25 VDC
Current ratings	Target on <1 mA Target off >3 mA

Wiring diagram (45)

NAMUR

Solenoid Valve

Solenoid Output

Solenoid Power

Valve open  
Valve closed

Sensor specifications

P+F NAMUR sensors ( \_A and \_N )

Configuration	(2) NAMUR sensors (EN 60947-5-6) _A sensor NJ2-12GK-SN _N sensor NJ2-V3-N-V5
Operation	NO/NC (cam selectable)
Current ratings	Target present    Current < 1.0 mA Target absent    Current > 3.0 mA
Voltage range	5 - 25 VDC
Operating life	Unlimited



P+F NAMUR sensors ( \_B )


Configuration	(2) NAMUR NO sensors (EN 60947-5-2) NJ5-30GK-S1N
Operation	NO/NC (cam selectable)
Current ratings	Target present    Current > 3.0 mA Target absent    Current < 1.0 mA
Voltage range	5 - 25 VDC
Operating life	Unlimited


6 | Valve communication & control

StoneL.com

## Sensors and communications

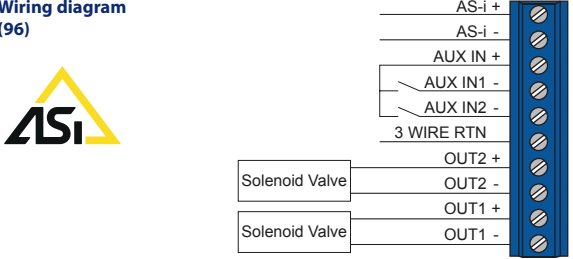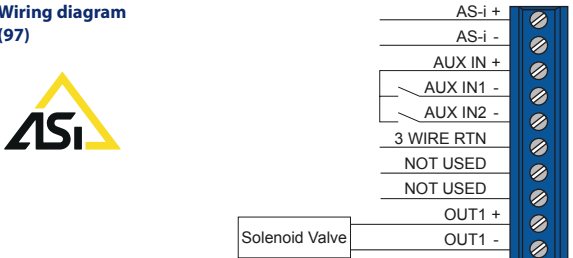Valve Communication Terminal (VCT) specifications	
AS-Interface (96)	
Configuration	(2) Discrete sensor inputs (2) Auxiliary discrete inputs (2) Power outputs (solenoids)
Maximum current	160 mA, both outputs combined
Auxiliary inputs	24 VDC @ 2 mA (self-powered)
Output	4 watts @ 24 VDC both outputs combined
Outputs, voltage	21 - 26 VDC
Configuration code	ID=F, IO=4; user defined (4DI/2DO)
AS-i version	3.0
Devices per network	31
<b>Wiring diagram (96)</b> 	
AS-Interface VCT with extended addressing (97)	
Configuration	(2) Discrete sensor inputs (2) Auxiliary discrete inputs (1) Power output (solenoid)
Maximum current	100 mA
Auxiliary inputs	24 VDC @ 2 mA (self-powered)
Output	2 watts @ 24 VDC
Output, voltage	21 - 26 VDC
Configuration code	ID=A, IO=4; user defined (4DI/1DO)
AS-i version	3.0
Devices per network	62
<b>Wiring diagram (97)</b> 	

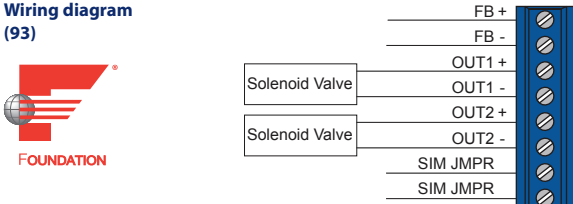
Valve Communication Terminal (VCT) specifications	
Foundation Fieldbus VCT, bus powered (93)	
Configuration	(2) Discrete Inputs (2) Power outputs (solenoids) Multiple DI/DO blocks or modified output block
Outputs	2 mA @ 6.5 VDC each current limited to 2 mA (bus powered)
Devices per network	Max of 16 devices recommended
<b>Wiring diagram (93)</b> 	

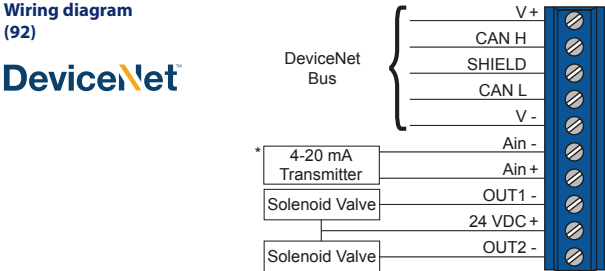Valve Communication Terminal (VCT) specifications	
DeviceNet™ (92)	
Configuration	(2) Discrete inputs (open and closed) (2) Power outputs (solenoids) (1) 4-20 mA auxiliary analog input, 10-bit resolution; no additional power source required
Transmission rate	Software selectable 125K, 250K or 500K baud
Messaging	Polling, cyclic and change of state
Outputs	4 watts @ 24 VDC outputs combined
Outputs, voltage	24 VDC (with input voltage ranging from 10 - 24 VDC)
Other features	Predetermined output fail state
<b>Wiring diagram (92)</b> 	
* 4-20 mA transmitter not included	

## Sensors and switches

### Maxx-Guard proximity switch

Maxx-Guard hermetically-sealed switches are suitable for computer input circuits and general purpose applications. SPDT tungsten contacts are designed for 125 VAC computer inputs and 240 VAC moderate power applications. SPDT rhodium contacts are suitable for both 24 VDC and 120 VAC computer inputs. SPST ruthenium contacts are ideal for either 24 VDC or 125 VAC low power computer inputs.

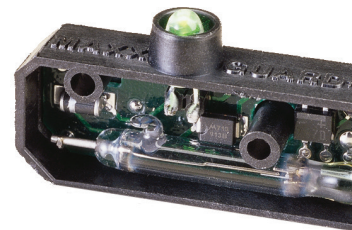

#### Maxx-Guard proximity switch Single-Pole Single-Throw (SPST)

##### J switch

Configuration	SPST NO; passive (intrinsically safe)
Electrical ratings	0.10 amp @ 10 - 30 VDC
Maximum voltage drop	0.1 volts @ 10 mA 0.5 volts @ 100 mA
Contact composition	Ruthenium

##### P switch

Configuration	SPST NO
Electrical ratings	0.15 amp @ 125 VAC/30 VDC
Maximum voltage drop	0.1 volts @ 10 mA 0.5 volts @ 100 mA
Contact composition	Ruthenium



#### Specifications

Temperature range	-40° C to 80° C (-40° F to 176° F)
Seal	Hermetically-sealed
Operating life	5 million cycles
Warranty	Two years

#### Maxx-Guard proximity switch Single-Pole Double-Throw (SPDT)

##### G switch

Configuration	SPDT
Electrical ratings	0.2 amp @ 120 VAC 0.30 amp @ 24 VDC
Maximum voltage drop	0.1 volts @ 10 mA 0.5 volts @ 100 mA
Contact composition	Rhodium

##### H switch

Configuration	SPDT
Electrical ratings	240 volts max; 3 amps max 100 watts max; 2.0 watts min
Maximum voltage drop	0.1 volts @ 10 mA 0.5 volts @ 100 mA
Contact composition	Tungsten

##### M switch

Configuration	SPDT; passive (intrinsically safe)
Electrical ratings	0.10 amp @ 10 - 30 VDC
Maximum voltage drop	0.1 volts @ 10 mA 0.5 volts @ 100 mA
Contact composition	Rhodium

##### S switch

Configuration	SPDT (LED)
Electrical ratings	0.1 amp @ 120 VAC 0.1 amp @ 24 VDC
Maximum voltage drop	3.5 volts @ 10 mA 6.5 volts @ 100 mA
Contact composition	Rhodium







## Sensors and switches



### Mechanical switch (SPDT)

Low cost single-pole double-throw mechanical switches with silver contacts are recommended for high power 125 VAC applications. Gold contacts may be used in 24 VDC computer input applications when cycle life does not exceed 100,000 operations.

Mechanical switch (SPDT)	
Silver contacts (V switch)	
Electrical ratings	10 amp @ 125 / 250 VAC 0.5 amp @ 125 VDC
Operating life	400,000 cycles
Not recommended for electrical circuits operating at less than 20 mA @ 24 VDC.	
Gold contacts (W switch)	
Electrical ratings	1 amp @ 125 VAC 0.5 amp @ 30 VDC
Operating life	100,000 cycles
 	


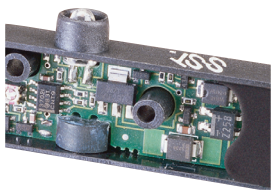
### Mechanical switch (DPDT)

Double-pole double-throw mechanical switches enable two electrical circuits to be activated simultaneously. Each switch circuit is electrically isolated from the other. As with standard silver contacts, DPDT switches are designed to operate in high-power applications.

Mechanical switch (DPDT)	
14 switch	
Electrical ratings	4.5 amp @ 125 / 250 VAC, 24 - 125 VDC
Operating life	250,000 (VAC), 100,000 (VDC) cycles
Not recommended for electrical circuits operating at less than 20 mA @ 24 VDC.	
 	

### SST switching sensor

Solid state SST proximity sensors are ideal for use in AC and DC computer input circuits.

SST switching sensors	
X switch	
Operation	NO/NC (cam selectable)
Maximum inrush current	1.0 amps @ 125 VAC/VDC
Maximum continuous current	0.1 amps @ 125 VAC/VDC
Minimum on current	2.0 mA
Leakage current	Less than 0.50 mA
Voltage range	24 - 125 VAC 8 - 125 VDC
Maximum voltage drop	6.5 volts @ 10 mA 7.5 volts @ 100 mA
Operating life	Unlimited
Warranty	Five years
 	

## Model selector

## SERIES

QX Explosionproof dual modules and VCTs

## FUNCTIONS

## Sensor/switching modules (proximity type)

- 35 SST Universal NO switching sensor dual module
- 45 NAMUR dual module (EN 60947-5-6; I.S.)

## Valve Communication Terminals (VCTs)

- 92 DeviceNet™
- 93 Foundation Fieldbus (bus powered; I.S.)
- 96 AS-Interface
- 97 AS-Interface (with extended addressing)

## ENCLOSURE

- E Aluminum North American (NEC/CEC)
- R Aluminum International (IEC)
- F Aluminum Brazilian
- V Aluminum Russian
- S\* Stainless steel North American (NEC/CEC)
- T\* Stainless steel International (IEC)
- M\* Stainless steel Brazilian
- L Stainless steel Russian

\* Available with 03 or 06 conduit entry only

## CONDUIT ENTRIES

- 02 (1) ¾" NPT & (1) ½" NPT
- 03 (1) ¾" NPT & (2) ½" NPT
- 05 (2) M20
- 06 (3) M20

## OUTPUT

- S Short visual indicator
- N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

- RA Red closed/green open
- GA Green closed/red open
- 1A T-1 three way flow path
- 2A T-2 three way flow path
- 3A T-3 three way flow path
- 4A T-4 three way flow path
- 5A T-5 three way flow path
- 0A No mechanical indication
- XA Special
- CA Continuous

Model number example

QX 35 E 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QX Explosionproof proximity switches

## FUNCTIONS

## Sensors

- 2E (2) P+F special 3-wire NPN sensor; NBB2-V3-E0-V5
- 2F (2) PNP solid state 3-wire P+F sensor; NBB2-V3-E2-V5
- 2G (2) SPDT Maxx-Guard (low current)
- 2H (2) SPDT Maxx-Guard (3 amp)
- 2L (2) SPST Maxx-Guard (LED)
- 2P (2) SPST Maxx-Guard
- 2S (2) SPDT Maxx-Guard (LED)
- 4G (4) SPDT Maxx-Guard (low current)
- 4H (4) SPDT Maxx-Guard (3 amp)
- 4L (4) SPST Maxx-Guard (LED)
- 4P (4) SPST Maxx-Guard
- 4S (4) SPDT Maxx-Guard (LED)

## ENCLOSURE

- E Aluminum North American (NEC/CEC)
- R Aluminum International (IEC)
- F Aluminum Brazilian
- V Aluminum Russian
- S\* Stainless steel North American (NEC/CEC)
- T\* Stainless steel International (IEC)
- M\* Stainless steel Brazilian
- L Stainless steel Russian

\* Available with 03 or 06 conduit entry only

## CONDUIT ENTRIES

- 02 (1) ¾" NPT & (1) ½" NPT
- 03 (1) ¾" NPT & (2) ½" NPT
- 05 (2) M20
- 06 (3) M20

## OUTPUT

- S Short visual indicator
- N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

- RA Red closed/green open
- GA Green closed/red open
- 1A T-1 three way flow path
- 2A T-2 three way flow path
- 3A T-3 three way flow path
- 4A T-4 three way flow path
- 5A T-5 three way flow path
- 0A No mechanical indication
- XA Special
- CA Continuous

Model number example

QX 2G R 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QX Explosionproof mechanical switches and position transmitters

## FUNCTIONS

## Mechanical switches

- 2V (2) SPDT switches  
 2W (2) SPDT switches, gold contact  
 4V (4) SPDT switches  
 4W (4) SPDT switches, gold contact  
 14 (2) DPDT switches

## Position transmitters

- 50 Standard with no switches  
 5G Standard with (2) SPDT Maxx-Guard (low current)  
 5V Standard with (2) SPDT mechanical switches  
 5W Standard with (2) SPDT mechanical switches, gold contact  
 53 Standard with SST (33) NO switching sensor dual module  
 54 Standard with NAMUR (44) dual module (EN 60947-5-6; I.S.)  
 70 High performance (HP) with no switches  
 7G HP with (2) SPDT Maxx-Guard (low current)  
 73 HP with SST (33) NO switching sensor dual module  
 74 HP with NAMUR (44) dual module (EN 60947-5-6; I.S.)  
 TO 4-20 mA non-contact with no switches  
 TT 4-20 mA non-contact with SST (35) NO switching sensor dual module  
 TR 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.)

## ENCLOSURE

- E Aluminum North American (NEC/CEC)  
 R Aluminum International (IEC)  
 F Aluminum Brazilian  
 V Aluminum Russian  
 S\* Stainless steel North American (NEC/CEC)  
 T\* Stainless steel International (IEC)  
 M\* Stainless steel Brazilian  
 L Stainless steel Russian  
 \* Available with 03 or 06 conduit entry only

## CONDUIT ENTRIES

- 02 (1) 3/4" NPT & (1) 1/2" NPT  
 03 (1) 3/4" NPT & (2) 1/2" NPT  
 05 (2) M20  
 06 (3) M20

## OUTPUT

- S Short visual indicator  
 N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

- RA Red closed/green open  
 GA Green closed/red open  
 1A T-1 three way flow path  
 2A T-2 three way flow path  
 3A T-3 three way flow path  
 4A T-4 three way flow path  
 5A T-5 three way flow path  
 0A No mechanical indication  
 XA Special  
 CA Continuous

Model number example

QX 2V E 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QX International dual Ex d / Ex ia certified

## FUNCTIONS

## Sensor/switching modules (proximity type)

- 45 NAMUR dual module (EN 60947-5-6; I.S.)

## Sensors

- 2A (2) P+F; NJ2-12GK-SN  
 2B (2) P+F; NJ5-30GK-S1N  
 2J (2) SPST (passive)  
 2M (2) SPDT (passive)  
 2N (2) P+F NAMUR sensors; NJ2-V3-N  
 4A (4) P+F; NJ2-12GK-SN  
 4J (4) SPST (passive)  
 4M (4) SPDT (passive)

## Position transmitters

- TO 4-20 mA non-contact with no switches  
 TR 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.)

## ENCLOSURE

- R Aluminum International (IEC)  
 V Aluminum Russian  
 T\* Stainless steel International (IEC)  
 L Stainless steel Russian  
 \* Available with 03 or 06 conduit entry only

## CONDUIT ENTRIES

- 02 (1) 3/4" NPT & (1) 1/2" NPT  
 03 (1) 3/4" NPT & (2) 1/2" NPT  
 05 (2) M20  
 06 (3) M20

## OUTPUT

- S Short visual indicator  
 N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

- RA Red closed/green open  
 GA Green closed/red open  
 1A T-1 three way flow path  
 2A T-2 three way flow path  
 3A T-3 three way flow path  
 4A T-4 three way flow path  
 5A T-5 three way flow path  
 0A No mechanical indication  
 XA Special  
 CA Continuous

Model number example

QX 45 R 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QN Nonincendive dual modules and VCTs

## FUNCTIONS

## Sensor/switching modules (proximity type)

35 SST Universal NO switching sensor dual module

## Valve Communication Terminals (VCTs)

92 DeviceNet™

93 Foundation Fieldbus (bus powered) *[intrinsically safe]*

96 AS-Interface

97 AS-Interface with extended addressing

## ENCLOSURE

## Clear cover

C North American (NEC/CEC)

D International (IEC)

## CONDUIT ENTRIES

02 (1) 3/4" NPT &amp; (1) 1/2" NPT

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

05 (2) M20

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

VISUAL INDICATOR *[see chart on page 17]*

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QN 35 C 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QN Nonincendive proximity switches

## FUNCTION

## Sensors

2F (2) PNP solid state 3-wire P+F sensor; NBB2-V3-E2-V5

2G (2) SPDT Maxx-Guard (low current)

2H (2) SPDT Maxx-Guard (3 amp)

2L (2) SPST Maxx-Guard (LED)

2P (2) SPST Maxx-Guard

2S (2) SPDT Maxx-Guard (LED)

4G (4) SPDT Maxx-Guard (low current)

4H (4) SPDT Maxx-Guard (3 amp)

4L (4) SPST Maxx-Guard (LED)

4P (4) SPST Maxx-Guard

4S (4) SPDT Maxx-Guard (LED)

4X (4) SST sensor (LED)

## ENCLOSURE

## Clear cover

C North American (NEC/CEC)

D International (IEC)

## CONDUIT ENTRIES

02 (1) 3/4" NPT &amp; (1) 1/2" NPT

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

05 (2) M20

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

VISUAL INDICATOR *[see chart on page 17]*

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QN 2G C 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.



## Model selector

## SERIES

QN Intrinsically safe (I.S.) proximity switches and position transmitters

## FUNCTIONS

## Sensor/switching modules (proximity type)

45 NAMUR dual module (EN 60947-5-6; I.S.)

## Sensor

2A (2) P+F; NJ2-12GK-SN

2B (2) P+F; NJ5-30GK-S1N

2J (2) SPST (passive)

2M (2) SPDT (passive)

2N (2) P+F NAMUR sensors; NJ2-V3-N

4J (4) SPST (passive)

4M (4) SPDT (passive)

4N (4) P+F NAMUR sensors; NJ2-V3-N

## Position transmitters

50 Standard with no switches

70 High performance (HP) with no switches

TO 4-20 mA non-contact with no switches

TR 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.)

## ENCLOSURE

## Clear cover

C North American (NEC/CEC)

H Russian

D International (IEC)

## Aluminum cover [not explosion proof]

E North American (NEC/CEC)

R International (IEC)

F Brazilian

L Russian

## CONDUIT ENTRIES

02 (1) 3/4" NPT &amp; (1) 1/2" NPT

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

05 (2) M20

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QN 45 C 02 N RA - OPTIONAL

**MODEL NUMBER** **PARTNERSHIP ID**

Mounting hardware required and sold separately.

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QN Nonincendive proximity switches and position transmitters

## FUNCTIONS

## Position transmitters

50 Standard with no switches

5G Standard with (2) SPDT Maxx-Guard (low current)

70 High performance (HP) with no switches

7G High performance (HP) with (2) SPDT Maxx-Guard (low current)

TO 4-20 mA non-contact with no switches

TT 4-20 mA non-contact with SST (35) NO switching sensor dual module

## ENCLOSURE

## Clear cover

C North American (NEC/CEC)

D International (IEC)

## CONDUIT ENTRIES

02 (1) 3/4" NPT &amp; (1) 1/2" NPT

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

05 (2) M20

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

## VISUAL INDICATOR [see chart on page 17]

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QN 50 C 02 N RA - OPTIONAL

**MODEL NUMBER** **PARTNERSHIP ID**

Mounting hardware required and sold separately.

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QC Low temperature, explosionproof dual modules

## FUNCTIONS

## Sensor/switching modules (proximity type)

35 SST Universal NO switching sensor dual module

45 NAMUR dual module (EN 60947-5-6; I.S.)

## ENCLOSURE

E Aluminum North American (NEC/CEC)

R Aluminum International (IEC)

V Aluminum Russian

S Stainless steel North American (NEC/CEC)

T Stainless steel International (IEC)

L Stainless steel Russian

## CONDUIT ENTRIES

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

## VISUAL INDICATOR

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QC 35 E 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

## SERIES

QC Low temperature, explosionproof mechanical switches

## FUNCTIONS

## Mechanical switches

2V (2) SPDT switches

2W (2) SPDT switches, gold contact

4V (4) SPDT switches

4W (4) SPDT switches, gold contact

## ENCLOSURE

E Aluminum North American (NEC/CEC)

R Aluminum International (IEC)

V Aluminum Russian

S Stainless steel North American (NEC/CEC)

T Stainless steel International (IEC)

L Stainless steel Russian

## CONDUIT ENTRIES

03 (1) 3/4" NPT &amp; (2) 1/2" NPT

06 (3) M20

## OUTPUT

S Short visual indicator

N Extended visual indicator

## VISUAL INDICATOR

RA Red closed/green open

GA Green closed/red open

1A T-1 three way flow path

2A T-2 three way flow path

3A T-3 three way flow path

4A T-4 three way flow path

5A T-5 three way flow path

0A No mechanical indication

XA Special

CA Continuous

Model number example

QC 2V E 02 N RA - OPTIONAL

## MODEL NUMBER

Mounting hardware required and sold separately.

## PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Model selector

### SERIES

QG General purpose mechanical switches (clear cover)

### FUNCTION

#### Mechanical switches

- 2V (2) SPDT switches
- 2W (2) SPDT switches, gold contact
- 4V (4) SPDT switches
- 4W (4) SPDT switches, gold contact
- 14 (2) DPDT switches

### ENCLOSURE

- C General purpose, universal

### CONDUIT ENTRIES

- 02 (1) 3/4" NPT & (1) 1/2" NPT
- 03 (1) 3/4" NPT & (2) 1/2" NPT
- 05 (2) M20
- 06 (3) M20

### OUTPUT

- S Short visual indicator
- N Extended visual indicator

### VISUAL INDICATOR

- RA Red closed/green open
- GA Green closed/red open
- 1A T-1 three way flow path
- 2A T-2 three way flow path
- 3A T-3 three way flow path
- 4A T-4 three way flow path
- 5A T-5 three way flow path
- 0A No mechanical indication
- XA Special
- CA Continuous

Model number example

QG 2V C 02 N RA - \_\_\_\_\_ OPTIONAL \_\_\_\_\_

### MODEL NUMBER

Mounting hardware required and sold separately.

### PARTNERSHIP ID

Some models may include 5-digit identification suffix.

## Specifications

### Materials of construction

Housing & cover	Epoxy-coated anodized marine grade aluminum or stainless steel
Clear cover & indicator	Lexan® polycarbonate
Elastomer seals	Buna-N; optional EPDM
Drive shaft	Stainless steel
Drive bushing	Bronze, oil impregnated
Fasteners	Stainless steel
Operating temperature range	-40° C to 80° C (-40° F to 176° F) (Typical) -55° C to 80° C (-67° F to 176° F) (QC series only)

### Warranty

Mechanical components	Two years
SST & dual modules	Five years

Lexan® is a registered trademark of General Electric Corporation.

## Ratings

Explosionproof (Ex d, Zone 1 or Class I and II, Div. 1)	QX models*
Nonincendive (Class I and II, Div. 2)	QN models*
Intrinsically safe (Ex ia, Zone 0 or Class I and II, Div. 1)	Functions 44, 45, 93, _A, _J, _M and _N*

### Enclosure protection

Type 4, 4X and 6	All models
Ingress Protection 66 and 67	All models



### Approvals\*

See [Stonel.com/approvals](https://www.stonel.com/approvals)



\* Only models listed on Stonel's official website are approved per specific rating.

## Dimensions

### Output option "S" - Short visual indicator

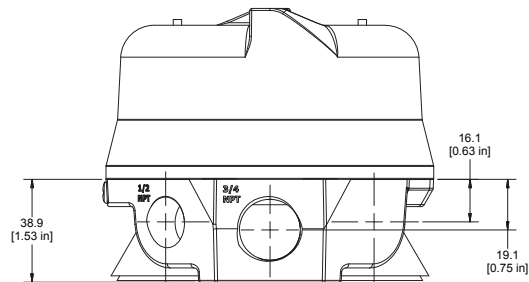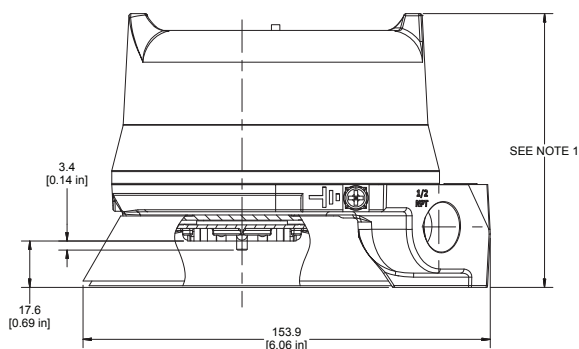

### Output option "N" - Extended visual indicator

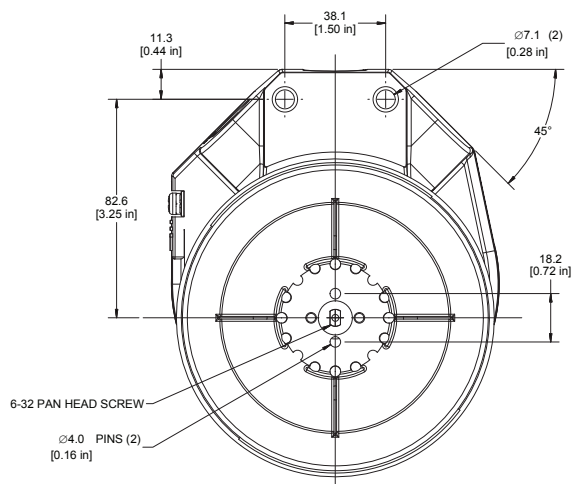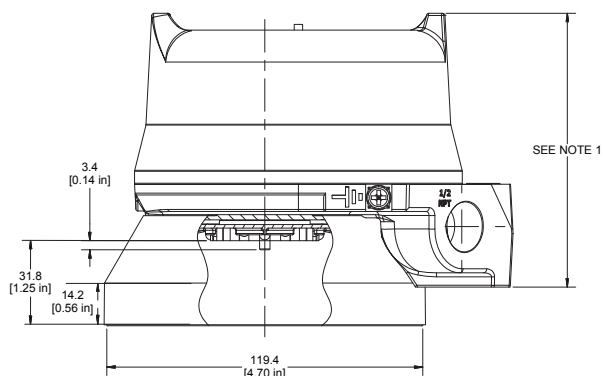














### NOTE 1

Cover height varies based on model number.  
Dual module and 2-switch models use short covers.

- Short cover = 102 mm [4.0"]
- Medium cover = 123.4 mm [4.86"]
- Tall cover = 155.4 mm [6.12"]



## Visual indicator designations

DESIGNATION	0°	90°	180°
R	RED CLOSED	GREEN OPEN	
G	GREEN CLOSED	RED OPEN	
1			
2			
3		CLOSED	
4			
5			
C			
X	Specialty configuration - please consult factory		



26271 US Highway 59, Fergus Falls, MN 56537 USA

Tech hotline +1 218 737 0701

Tel. +1 218 739 5774

Email: [sales@stoneL.com](mailto:sales@stoneL.com)

**StoneL.com**

Publication Number

S-912-12/20

Subject to change without prior notice. Neles, Jamesbury and Easyflow by Neles, StoneL, and certain other trademarks, are either registered trademarks or trademarks of Neles Corporation or its subsidiaries or affiliates in the United States and/or in other countries. For more information [www.neles.com/trademarks](http://www.neles.com/trademarks)